

LST Series

External side mount level sensor series with Taper Thread



External side mount quick fit device available in Nylon & Polypropylene. The device has Nut & Washer free fitment. The conical nature of taper thread prevents the liquid to leak through the tank walls. The fitment is 1/2" NPT style & is also compatible to 1/2" BSP. The Reed switch operates within 40 deg movement of the float. The 10 W switch makes the device economical than float switches available in the market. Suitable for applications ranging from water to industrial fluids where hassle free quick fitment is advisable. The level sensor has fit & forget durability and is capable of switching load up to 200 Vdc.

Specifications

	LSH1 01	LSH1 02
Material	Nylon	Polypropylene
Temp range (deg C)	-20 to +75	-20 to +100
Min fluid S.G .	0.85	0.85
Contact Form	N/O (N/C)	N/O (N/C)
Switching Power (VA)	10	10
Switching Voltage (V)	200dc	200dc
Switching current (A)	0.5	0.5
Lead Outs	22 AWG PVC 50 cm Std	22 AWG PVC 50 cm Std

Features

- 1) Economical Range
- 2) 10 W Switching
- 3) Reliable & consistent signal
- 4) External Mount

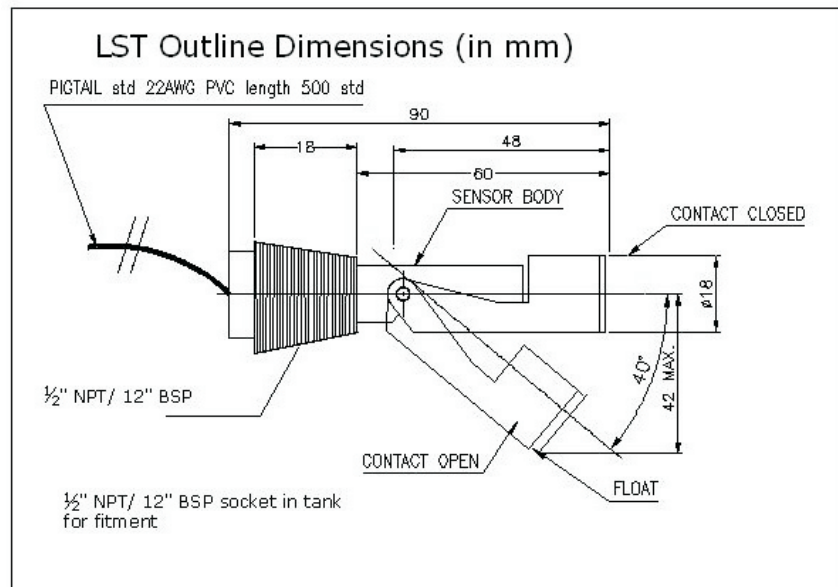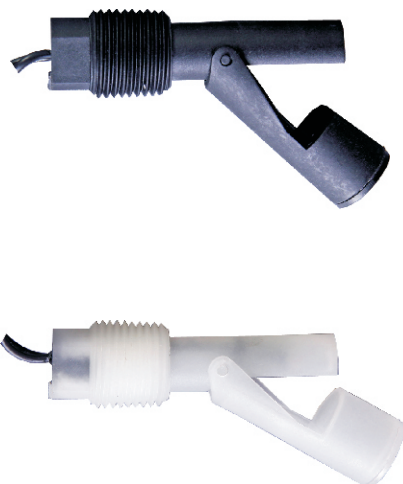

Standard Parts

Description

LST01HP

10 W 200 Vdc Horizontal Internal Mount Level Switch in Nylon with 50 cms PVC lead

LST02HP

10 W 200 Vdc Horizontal Internal Mount Level Switch in Polypropylene with 50 cms PVC lead

Contact us:

37, Gultekadi,
Industrial Estate,
Pune - 411037, India
Tel : 020-25465915
Email:c3cauro@gmail.com
www.c3cauro.com

Note: For customised solutions contact CAT

All Rights Reserved. Specifications are subject to change without prior notice.